


更改 REV	出图日期 DATE	设变内容 MODIFICATION	修 改 DRAWN
B	2011/03/03 2015/01/14	铁壳燕尾部位改为R角	CathyLi

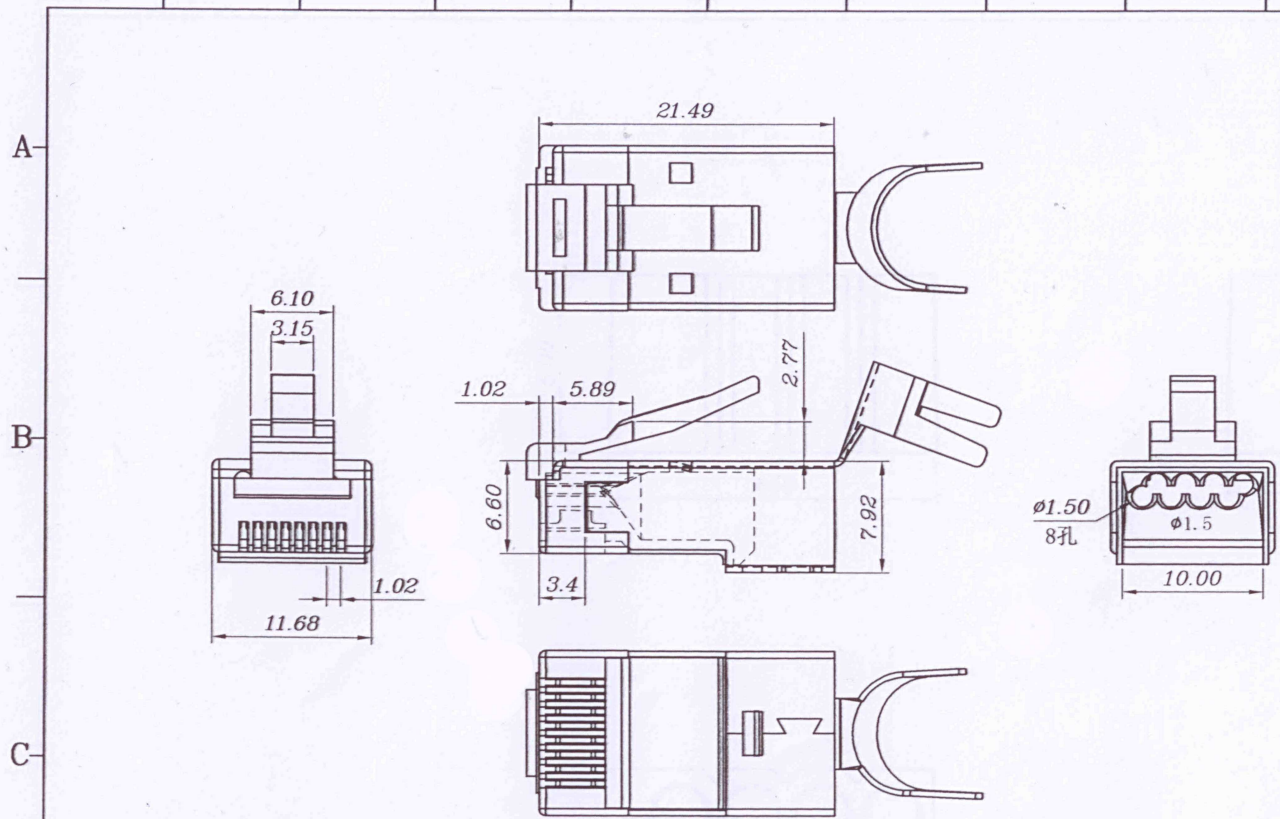

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.
 INSULATION RESISTANCE: 100 MΩ.
 TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH: 20POUND MIN.
 DURABILITY: 200 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: COPPER ALLOY.
 CONDUCTOR: STRANDED & SOLID WIRE, 22AWG, 24 AWG.
 (It can be used for the wire OD from 1.35~1.45)
 GOLD PLATING: 3u"~50u", ARE AVAILABLE.

规范

1.电器:

UL应用最大250VOLTS AC.
 介质耐电压伏特数:1000VOLTS AC.
 绝缘阻抗:100百万欧姆.
 终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2.机构

拉力测试:至少20磅.
 耐力测试:至少200次之插拔测试.

3.材质表面处理

塑胶壳:聚碳酸酯,UL-94V-0 or UL94V-2.
 颜色:透明,或者其他颜色亦可.
 金片:铜合金.
 导体:多股线&单股线,22AWG,24AWG.
 (芯线直径:φ1.35~φ1.45均可适用)
 镀金厚度:3u"~50u",皆可提供.

客户用产品图

KONA8-50D/L6A



EM 3R5Z50V2SIT- 5)									
BLADE:	Y	YB	Z	AE	AL	ZL			
Drawing									
Mark			✓			✓			
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark						✓	Mark	✓	

